


# Web Buffer Module WB4

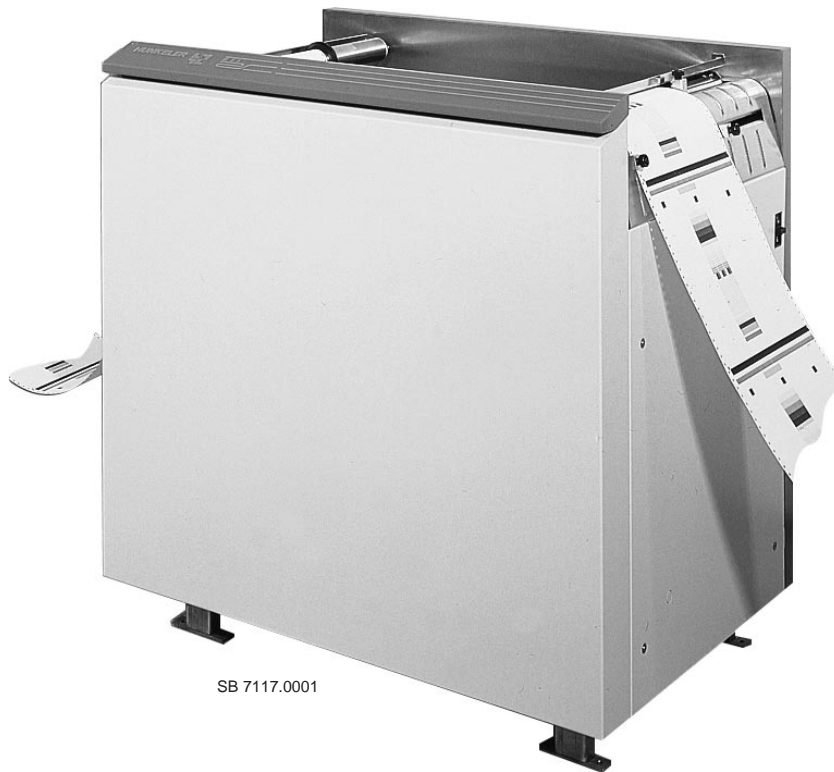

SB 7117.0001

## Purpose

The WB4 stores the paper-web during a short stop-cycle at the next module in the system, thereby preventing frequent printer stops.

## Method of operation

The web coming out of the printer is drawn into the storage bin placed ahead of it by means of hold-down and transport rollers, the lateral position of the web being controlled. If the next module stops briefly, the storage bin takes up the quantity of paper which accumulates. The length of loop in the bin is controlled by an integral loop-control system. The quantity stored is defined via the display at the next module. The original quantity of paper is restored by the catch-up speed of the next module.


## Basic equipment

- Machine frame with web feed, storage guide, storage bin and run-out jockey


## Specification

Paper weight:	70 - 120 g/m <sup>2</sup>
Roll width:	max. 20.5" (520.7 mm) min. 6.5" (165 mm)
Web speed:	max. 80 m/min
Electrical connection:	PNE 3x1.5 mm <sup>2</sup> , 230 V AC, 50/60 Hz
Operating power:	0.09 kW=307 BTU/h
Current consumption:	0.3 A
Weight:	143 kg

The data given apply to standard applications/installations. We reserve the right to make changes to the technical data or to our products, as a result of technical improvements. The exact specifications for the goods to be supplied will be contractually agreed for each individual case.

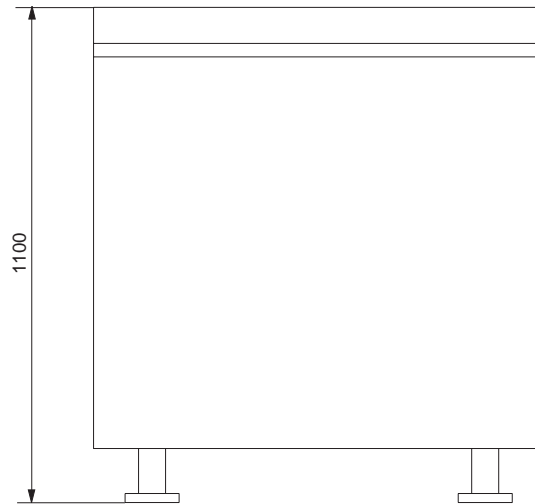

SB 7117.0002

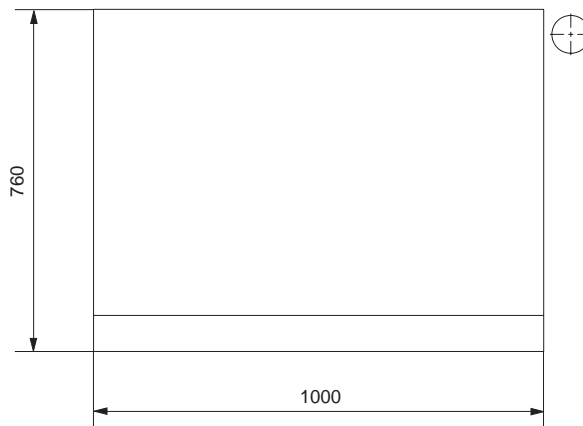

© by HUNKELER AG

■ Hunkeler AG, Bahnhofstrasse 31, CH-4806 Wikon

Tel. (+41) 62 745 61 61 Fax (+41) 62 745 62 60

■ Hunkeler Deutschland GmbH, Bergstrasse 15, D-82024 Taufkirchen

Tel. (+49) 89 614 1590 Fax (+49) 89 612 8400

■ Hunkeler Italia Srl., Via Stephenson 43/A, I-20157 Milano

Tel. (+39) 0239 000 600 Fax (+39) 0239 000 570

■ Hunkeler Corporation, 1400 Marietta Parkway, Suite 110,  
Marietta GA 30067 USA

Tel. (+1) 770 425 65 61 Fax (+1) 770 425 65 24

■ Hunkeler Far East Ltd., Room 1001, East Town Building,  
41 Lockhart Road, Wanchai, Hong Kong

Tel. (+852) 2528 4082 Fax (+852) 2866 2401