


Feeder 568

Reliable sheet feeding to in-line finishing



- ✓ *Delivers single sheets to 3rd party finishing device*
- ✓ *Alternate stack delivery via Stacker s20*
- ✓ *Single or merged stream delivery*
- ✓ *Optional 2-up side by side delivery*

Service Area

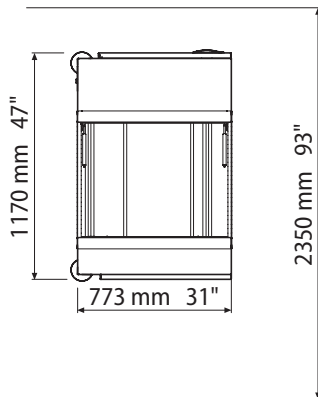

Technical Specifications

Performance / Media

Speed max.	450 ft/min	137 m/min
Feeding	Pinfed or pinless	
Paper weight	10.7# bond - 53# bond index 40 - 200 gsm (S/M 2 x 100 gsm)	
Web width	5.5" - 20.5"	140 mm - 520 mm
Sheet length	8 - 30" after 561	203 mm - 762 mm
	8 - 48" after 566	203 mm - 1219 mm

Options

SheetFeeding kit

Electrical

Power	10A, 200 - 240 VAC, 50/60 Hz or (North America) 15A, 1 Phase, 208 V, REC=L6-15R	
Consumption	400 W (in use)	100 W (idle)
Heat output	275 kcal/h - 825 kJ/h - 775 BTU/h	

Environmental

Temperature	60 - 80° F	15 - 27° C
Acoustics	70 dB(A)	
Humidity	50 +10%	

Dimensions

Length	31"	773 mm
Width	47"	1170 mm
Height excl. display	46"	1165 mm
Weight	264 lb	120 kg
Color	Gray	

Approvals

CE (98/37/EG), EMC Class A, LVD,
CB EN 60950, cULus 60950-1,
FCC15 Class A, VCCI

Product Specifications



16092014

©2014 Tecna. All rights reserved. The Tecna name and logo are trademarks of Tecna. Tecna reserves the right to make any technical amendments without prior notification.



TECNAU
w w w . t e c n a u . c o m

Europe	Italy	+39 0125 631678	info.it@tecna.com
	Sweden	+46 372 256 00	info.se@tecna.com
Americas	USA	+1 978 608 0500	info.us@tecna.com
Asia Pacific	China	+86 159 00710147	info.cn@tecna.com
	Singapore	+65 6793 9478	info.sg@tecna.com