

Stack 2030

Powerful speed, smooth controls





The Stack 2030 high-speed cutting and stacking solution for lightweight paper includes the Buffer 530, Cutter c20, and the Stacker s30.

Get unprecedented reliability for high performance cutting and stacking from webfed digital printers. Using rotary technology for precise cutting at speeds up to 600 feet per minute, the Stack 2030 is an ideal solution for printers who want to be well positioned, ensuring speed compatibility with both monochrome and color printers for today and tomorrow.

Whatever your printing needs, the versatile Stack 2030 is your solution. Effortlessly produce print on demand applications as 1-up, 2-up or 3-up stacks ready for near-line binding. For statements or TransPromo applications, create 2-up merged stacks from pinfed or pinless paper. The integrated stacking buffer keeps throughput at maximum levels.

- Speed up to 600 fpm
- ✓ Lightweight paper 40 gsm
- √ TransPromo and Books
- ✓ Flexible control of waste pages
- ✓ Document integrity control

Featuring our new Smooth-Web™ motion technology, the Stack 2030 reliably supports a broad range of media - as light as 40 gsm (11# bond) - without sacrificing production speed. An intuitive, touch-screen control panel and ergonomic design make operator adjustments quick and easy. Non-data sheets can be automatically diverted to the waste bin or separated on the conveyor.

Global service and around-the-clock support help ensure our reputation as the industry's reliability leader. Our products increase productivity, cut labor and paper costs, and even make new applications possible - Tecnau solutions truly empower digital print to help you do more with less.





Stack 2030

Powerful speed, smooth controls

The Stack 2030 system operates inline with web-fed digital printers at speeds up to 600 ft/min. The system delivers 1-up, 2-up or 3-up offset stacks ready for binding utilizing the Buffer 530, Cutter c20 and Stacker s30 modules. The optional Merger m20 allows 2-up print to be delivered in a single collated stack ready for inserting.

All modules in the Stack 2030 system incorporate Smooth-Web™ motion technology to gently transport paper from the printer to stacked output. This synchronization of the entire web to changes in speed provides unprecedented reliability and drastically reduces the likelihood of any paper jams.

After printing, the Buffer 530 accumulates the paper web and weaves it through rollers that rise and fall, filling the buffer and ensuring that stack deliveries will never stop the printer.

Next, the Cutter c20 utilizes a rotary knife to sheet the web and slit for 2-up or 3-up print streams. Its intuitive, touch-screen display controls the entire line and common operator adjustments are easily accessible even while running. The Cutter c20 instantaneously offsets the entire web horizontally to separate jobs or book blocks before sheets enter the stacker.

The Cutter c20 also features intelligent document integrity control to automatically recognize non-data or waste sheets and can divert these to the waste bin or separate on the delivery conveyor.

Following the Cutter c20, sheets enter the streaming section of the Stacker s30 where they are gently decelerated. In addition, each stream is precisely aligned and separated with sheets gliding smoothly onto the stack. This patent pending design maximizes control of the sheets and enables use of a wide range of media at high speeds. Perfect document quality is maintained by minimizing contact with the printed surface and preventing damage to the paper's sensitive edges.

The Stacker s30 builds up to 10"-tall stacks of sheets and has an integrated buffer for non-stop deliveries. Each job can be delivered to the conveyor one at a time, individually offset within the stack or delivered when the operator-

programmed stack height is reached. Stacks created with the Stack 2030 solution are neat, well-spaced apart and precisely trimmed for reliable binding or inserting.



Merger m20

Optional Capabilities

Slit Merge

The Merger m20 option allows a 2-up printed web to be slit and merged into a single, collated paper stream. Positioned before the Cutter c20, the web enters the Merger m20 and is slit in the center. A sensor continuously monitors the web for side-to-side variations or movement and the slitter automatically adjusts to cut precisely at the center of the web. The resulting two webs are then merged right-over-left or left-overright, depending on the requirements of the application.

Technical Specifications


Performance / Media

Printer speed	570 ft/min	174 m/min
Max. Speed	600 ft/min	180 m/min
Feeding	Pinfed or pinless	
Paper weight (paper dependent, above	10.5# bond - 140# index, 40 - 250 gsm 200 gsm requires application review)	
Web width	6" - 20.5"	150 - 520 mm
Form length	5.5" - 18"	140 - 457 mm
Stack height	Max. 10"	250 mm
Offset	0.6"	15 mm
Output options	1-, 2-, 3-up, and slit merge	

Electrical

Power 200 - 240 VAC 50/60 Hz, 10A, or 208 VAC, 1 Phase, 15A

Configuration Example

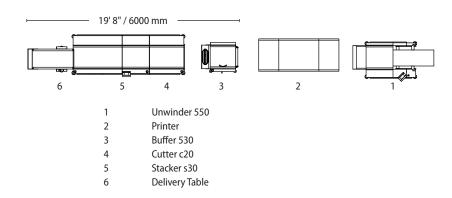

10112015

©2015 Tecnau. All rights reserved. The Tecnau name logo and Smooth-Web are trademarks of Tecnau. Tecnau reserves the right to make any technical amendments without prior notification.





Europe	ltaly	+39 0125 631678	info.it@tecnau.com
	Sweden	+46 372 256 00	info.se@tecnau.com
Americas	USA	+1 978 608 0500	info.us@tecnau.com
Asia Pacific	China	+86 159 00710147	info.cn@tecnau.com
	Singapore	+65 6793 9478	info.sg@tecnau.com