


TC 0250 S/L

Shingling Conveyor



- ✓ *Direct connection to the Tecnau Cutters*
- ✓ *Possibility to separate groups*
- ✓ *Base on wheels with blocking device*
- ✓ *Adjustable speed*

Service Area

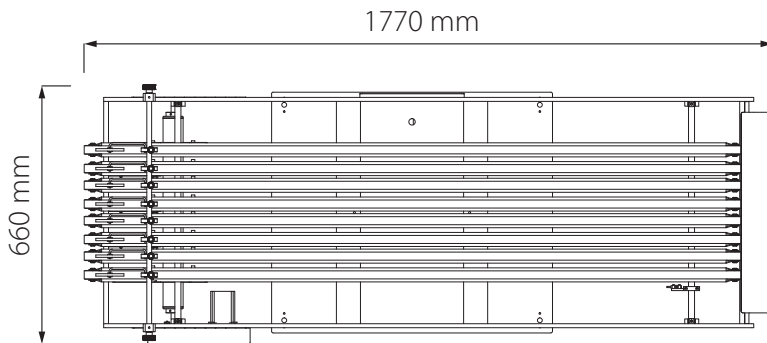

Technical Specifications

Performance / Media

Speed max.	130 ft/min	40 m/min
Paper form	1-up, 2-up, 3-up with optional separator plates	
Sheet width	20.5"	520 mm
Sheet length	0 - 39"	0 - 1000 mm
Level from floor	39"	990 mm

Electrical

Power	230 - 208 VAC, 50/60 Hz, 200 V A	
-------	----------------------------------	--

Environmental

Temperature	60 - 80° F	15 - 27° C
Humidity	40% - 60%	

Dimensions

Length	67"	1700 mm
Width	26"	660 mm
Height	44"	1120 mm
Weight	353 lb	160 kg

Approvals



2014/35/ EU, 2006/42/ EC, 2014/30/ EU
2011/65/ EU, 2012/19/EU, EN 12100:2010,
EN 60204-1:2006, EN 61000-6-2:2005,
EN 61000-6-4:2007, EN 50581:2012

Information

The TC 0250 S Shingling Conveyor is a sheet collecting tape, to be placed at the exit-side of the Cutter

Product Specifications



02022016

©2016 Tecnau. All rights reserved. The Tecnau name and logo are trademarks of Tecnau. Tecnau reserves the right to make any technical amendments without prior notification.



TECNAU
w w w . t e c n a u . c o m

Europe	Italy	+39 0125 631678	info.it@tecnau.com
	Sweden	+46 372 256 00	info.se@tecnau.com
Americas	USA	+1 978 608 0500	info.us@tecnau.com
Asia Pacific	China	+86 159 00710147	info.cn@tecnau.com
	Singapore	+65 6793 9478	info.sg@tecnau.com